



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

JCE21 U.S. PRO  
09/986622  
11/09/01

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99109154.7

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

30/05/00





Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung  
Sheet 2 of the certificate  
Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 99109154.7  
Demande n°:

Anmeldetag:  
Date of filing: 10/05/99  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
PIRELLI CAVI E SISTEMI S.p.A.  
20126 Milano  
ITALY

Bezeichnung der Erfindung:

Title of the invention:

Titre de l'invention:

Method of drawing large preforms and induction draw furnace therefore

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:

International Patent classification:

Classification internationale des brevets:

C03B37/029, C03B37/012, H05B6/02

Am Anmeldetag benannte Vertragsstaaten:

Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE

Etats contractants désignés lors du dépôt:

Bemerkungen:

Remarks: See for original title page 1 of the description.

Remarques:



10-05-1999

EP99109154.7

SPEC



Pirelli Società per Azioni

Direzione Proprietà Industriale  
7 May, 1999  
0270/rm- 5942

**SENT BY TELEFAX**

**0049 89 2399 4465**

Total pages transmitted: 56 (including this cover letter)

**EUROPEAN PATENT OFFICE**  
Directorate 4.5.  
Erhardtstrasse 27  
D-80298 Munchen  
(Germania)

Applicant's ref: PC809

Re: Filing of a European Patent Application having for title:  
"GRAPHITE INDUCTION FURNACE FOR DRAWING LARGE PREFORMS"  
in the name of **PIRELLI CAVI E SISTEMI S.p.A.**

Dear Sirs,


We are transmitting you the specification and the documents for filing the subject patent application, as indicated in the enclosed "*Request for grant of a European Patent*".

The relative administrative fees are to be debited to the **Deposit Account No. 28070089** in the name of **Pirelli Cavi e Sistemi S.p.A.**

**Confirmation copy of the documents will be sent under separate cover.**

With many thanks.

Yours faithfully,

  
Pier Giovanni Giannesi  
(G.A. 25553)

Viale Sarca, 222  
20126/Milano  
telefono 02.6442.1  
fax 02.6442.3190

Part.IVA 00886890151  
Registro Trib. Milano 197367  
CCIAA di Milano 576645

U.I.C. Iscrizione n.1743  
Capitale interamente versato  
L. 1.942.623.489.000

PC809

- 1 -

**GRAPHITE INDUCTION FURNACE FOR DRAWING LARGE PREFORMS****BACKGROUND OF THE INVENTION**

The present invention relates to a furnace for and method of drawing optical fibers and specifically to a  
5 graphite induction furnace for drawing optical fibers from large glass preforms and method for drawing optical fiber or smaller diameter preforms from such large-diameter preforms.

Furnace designed for drawing optical fibers may be  
10 divided into two main categories, defined by the method of heating, which can be conductive heating or inductive heating. Inductive heating furnace are generally preferred, mainly because of their flexibility of use. Induction  
15 furnaces may then be further categorized as using heating elements made of graphite or of zirconia.

These furnaces generally comprise a cylindrical  
susceptor (either graphite or zirconia), defining the heating zone of the furnace, surrounded by insulating material which is in turn surrounded by an induction coil.  
20 When the coil is energized, an electromagnetic field is generated which couples to the susceptor (generally preheated) increasing the temperature thereof and generating the desired hot zone for melting the preform inserted into the cylindrical susceptor. Extension, in the  
25 form of cylindrical tubes, may be provided on the top (the so-called top-chimney) and/or on the bottom (the so-called bottom chimney) of the heating zone of the furnace.

Graphite furnaces use ultra-pure graphite heating elements. A typical problem with these furnaces is the  
30 oxidation of the heating element. The reactivity of the graphite heating element also pollutes the reaction area. Therefore, the life of the heating element is short and frequent replacement of the element is required. These problems are commonly overcome by providing an inert,

PC809

- 2 -

protective atmosphere inside the furnace. Usually, argon or nitrogen is employed for the purpose. In US Patent No. 4,154,592 the use of helium as conditioning gas is disclosed. Its high thermal conductivity is helpful for better thermal stability and uniformity in the region close to the tip of the preform.

Several documents have discussed furnaces for drawing optical fiber. For example, IT 1,077,118 describes a high-frequency electric furnace comprising a tubular graphite core enclosing the items to be heated, and in turn enclosed by an induction winding to which high-frequency current is supplied. A housing enclosing the core has a wall composed of sections placed one on top of the other, and inert gas is delivered to the inside of it. The inert gas surrounding the core prevents oxidation of the core while the furnace is in operation. The gas is introduced at the center of the furnace and is allowed to escape between the outer sections. The furnace is capable of operating at temperatures of about 2000°C.

US 4,174,462 describes a large-diameter, general-purpose, graphite induction furnace. No conditioning gas is used in the furnace. Instead, the furnace is kept full of material to avoid oxidation damage to the graphite susceptor. The susceptor is insulated with powdered carbon black. The carbon black is contained within an asbestos and concrete cylinder.

DE 3,025,680 describes a graphite induction furnace for drawing optical fiber. The heating element is coated with a 10-micron-thick protective layer that does not react with glass, even at high temperatures, e.g., platinum or iridium. The coating prevents any material transport between the heating element and the glass.

US 4,154,592 describes a method of forming optical fiber by disposing a preform in a cylindrical muffle. The muffle is heated with a resistance heating element to a

PC809

- 3 -

temperature sufficient to cause a first end of the blank to reach the drawing temperature of the preform. Fiber is drawn from the first end of the preform while a helium-containing gas flows through the muffle in such a direction  
5 that it is exhausted from that end of the muffle from which the filament is being drawn.

US 4,400,190 describes a graphite resistance furnace for drawing optical fiber. The graphite heating element is generally cylindrical with a centrally located heating  
10 chamber of reduced cross-sectional area and areas of enlarged diameter on each end of the heating chamber. Inlet and exhaust tubes are inserted into the areas of enlarged diameter. The internal diameter of the centrally located heating chamber and the inner diameters of the inlet and  
15 exhaust tubes are substantially equal. The transitions from the centrally located heating chamber to the areas of enlarged diameter within the heating element may be tapered.

One problem associated with open-ended furnaces through  
20 which conditioning gas flow, however, is that turbulence around the preform and the newly drawn fiber can cause diameter variations and consequently affect fiber optical performances. One possible cause for such turbulence is the updraft of ambient air, as disclosed in US Patent No.  
25 5,284,499 and Patent EP 0 329 898, which suggest preventing updraft by inserting a shutter at the bottom of the furnace.

Another possible cause of turbulence is related to differences in the cross-sectional area of the conditioning  
30 gas flow around the preform. US Patent No. 4,400,180 suggests to minimize this source of turbulence by properly adjusting the ratio between the diameter of the heating element and the diameter of an extension provided to the heating element.



PC809

- 4 -

US 5,545,246 suggests to introduce an additional flow of conditioning gas in the draw down zone of the preform, in order to reduce turbulence which may be caused in the conditioning gas flowing along the preform in this zone.

5 In the article "Combination furnace for drawing large optical fiber preforms at high speed", M. Rajala et al., International Wire & Cables symposium 1998, a graphite induction furnace is disclosed wherein the susceptor is a graphite element having a 80 mm inner diameter.

10 The other type of furnaces, i.e. induction-heated zirconia furnaces, are of relatively simple construction and their ability to operate in air is a major advantage. Generally, the heating element in induction furnaces is an inert cylinder of  $ZrO_2$  stabilized with  $Y_2O_3$ .

15 One problem connected with the use of zirconia induction furnaces is the relatively high thermal inertia of zirconia. This results in quite long time intervals between two subsequent drawing operation, as the zirconia susceptor has to be naturally cooled before inserting the  
20 new optical preform. As a matter of fact thermal shocks caused by rapid changes in the temperature of the heating element constitute a serious problem for induction heated zirconia furnaces, thus preventing a forced cooling of it in between two subsequent drawing operations. In addition,  
25 when, for example, a furnace is shutdown due to a power failure or power supply problem, the zirconia cools through its structural transition, cracks, and must be replaced. This causes the furnace to be out of operation for a large amount of time, because the zirconia susceptor must be  
30 heated and stabilized before drawing can be initiated.

US 4,450,333 describes a zirconia induction furnace for drawing fiber from a preform. The furnace has a centrally located tubular susceptor with a thin coating of the preform material (e.g., silica) on at least a portion  
35 of its inside surface. The thin coating on the susceptor

PC809

- 5 -

prevents contaminating particles from migrating from small cracks in the inside surface of the susceptor onto the preform. A cylinder is positioned in concentric, spaced relation about the susceptor and is surrounded by an insulating grain. The cylinder prevents small particles emanating from the insulating grain from being drawn through larger cracks in the susceptor and onto the preform and/or the fiber.

US 4,608,473 describes a zirconia induction furnace for drawing fiber from a silica preform. The furnace includes an axially located tubular zirconium dioxide susceptor. Prior to use, at least a portion of the inside surface of the susceptor is coated with a vapor-deposited silica "soot." The silica soot is then consolidated at an elevated temperature. Such a technique substantially eliminates migration of zirconium dioxide particles from the susceptor to the preform and/or the fiber.

US 5,284,499 describes a zirconia induction furnace for drawing optical fiber. Gases introduced at the top of the furnace form a boundary layer adjacent to the fiber, which passes through the furnace, along with the fiber, into a tube. The tube isolates the fiber from the ambient atmosphere so that the boundary layer of gases established in the furnace remains substantially uniform until the viscosity of the cladding layer of the fiber is high enough to minimize differential stresses around the circumference of the fiber. A planar shutter is positioned at the bottom of the tube to prevent the ambient atmosphere from entering the bottom of the tube.

EP 849 232 describes a zirconia induction furnace for drawing optical fiber. Separate gas supplies inject a conditioning gas into the furnace between the preform and the furnace wall. A first gas supply is provided at the entry end of the furnace space and a second gas supply is provided in the drawing taper region at the exit end.

PC809

- 6 -

Other examples of furnaces for drawing optical fiber include: FR 2,368,677, describing a graphite induction furnace having multiple bores through the susceptor; EP 329898 describing an induction furnace with a disk-like shutter closing the bottom end; GB 1,521,231 describing a graphite induction furnace with an inner sleeve of zirconia; GB 1,575,299 describing a graphite induction furnace with a coated susceptor; US 4,142,063 describing a zirconia induction furnace; and US 5,017,209 describing a furnace with a cylindrical heater surrounded by an anisotropic cylindrical insulation.

Commercial furnaces either of the graphite or of the zirconia type, suitable for optical fiber drawing are available, for instance, from the following manufacturers: Astro (USA), Centorr(USA), Heathway (UK), Lepel (USA), Stanelco (UK).

Conventional preforms which may be employed in commercial furnace are typically of about 40-50 mm diameter (when produced according to MCVD - Modified Chemical Vapor Deposition - technology) and up to 70-80 mm (for those produced according to the OVD -Outside Vapor Deposition - or VAD - Vapor Axial Deposition - technology). Based on the preform diameter, conventional susceptor diameters are typically about 70 mm (MCVD preforms) or about 100 mm (OVD or VAD preforms).

The increasing demand of optical fibers requires improvements in optical fiber production process, which improvements may relate to more than one aspect of the process, such as for instance, increase in the drawing speed of the fiber or reduction of the dead-time between one drawing and the subsequent one.

For instance, use of preforms with a diameter larger than the conventional (e.g. 100 mm or more) could increase the productivity of optical fibres, as it would allow to produce longer lengths of optical fiber using a single

PC809

- 7 -

preform. Typically, the time required between the end of the drawing of a preform and the beginning of the subsequent one is of about 1-2 hours, depending on dimensions and materials of the furnace. By reducing the frequency of interruptions in the drawing process, an increase in optical fiber productivity can be obtained.

#### SUMMARY OF THE INVENTION

With the aim of developing larger diameter furnaces, the Applicant has however observed some problem associated with a simple scale-up of conventional furnaces, in order to adapt them to receive large diameter preforms.

One problem observed by the Applicant in connection with the heating of large diameter preform in conventional induction furnaces is the turbulence in the conditioning gas and in ambient atmospheric gas entering the furnace. As a matter of fact, in the neck-down zone of the preform, i.e. in the zone where the preform is drawn into an optical fiber, the free space between furnace's walls and preform gradually increases, up to a maximum in correspondence of the zone where the optical fiber is present.

If the diameter of the preform is sufficiently small, the free space in the neck-down zone is quite reduced and turbulence in the flow of conditioning gas may be prevented easier, as suggested by the prior art previously discussed. However, the Applicant has observed that by increasing the diameter of the preform also the free space in the neck-down zone is increased, thus rendering more difficult the control of turbulence in the flow of conditioning gas through the furnace and turbulence caused by unwanted intrusion of ambient atmospheric gases.

The applicant has further observed that the above drawbacks become more evident when the flow rate of conditioning gas through the furnace is increased, in order to meet the requirements connected to increased rates of

PC809

- 8 -

drawing speed of the optical fiber (e.g. up to about 20 m/s).

As a matter of fact, it is believed (see US 5,284,499) that the conditioning gas flowing around the fiber forms a boundary layer adjacent said fiber, which boundary layer allows a symmetric and gradual cooling of the outer portion of the optical fiber (the so-called cladding), thus preventing differential stresses to be generated on said fiber.

Applicant has however observed that in conventional furnaces, where the flow rate of conditioning gas inside the furnace is of few liter per minute, the conditioning gas has a velocity of only few mm/s at the outlet of said furnace. For instance, in US 5,284,499 the flow rate of the gas inside a furnace of 7 cm internal diameter is of about 3.1 l/min, generating a velocity of about 4 mm/s at the outlet of 1.25 cm diameter. Applicant noticed that this velocity of the gas is very low, as compared with the drawing velocity of the fiber (for instance, of 9 m/s as disclosed in US 5,284,499). Applicant believes that a low gas velocity, in particular in case of relatively high speed of the drawing process (e.g. at about 15 m/s and up to about 20 m/s), may generate undesired disruption of the boundary layer of conditioning gas surrounding the fiber thus causing unwanted asymmetrical cooling of the drawn fiber. In addition, a low velocity of conditioning gas can in some instances not be sufficient to create the necessary overpressure of the gas for avoiding updraft of ambient air from the outside; in particular, when the furnace has an outlet of relatively large diameter, the above velocity of the gas will be further decreased, thus further decreasing the gas pressure which should contrast the updraft of ambient air.

Applicant noticed that in prior art furnaces (see e.g. US 4,154,592, col. 3, lines 50-54 and US 5,284,499, col. 5,

PC809

- 9 -

lines 26-33) the gas is introduced into the furnace from its upper end and simply allowed to diffuse towards the bottom end, as the top end of the furnace is sealed. Thus, no means for somehow controlling the inlet flow of said conditioning gas and its flow through the furnace is provided in the prior art furnaces. As long as the flow rate of conditioning gas inside the furnace is kept rather low as in prior art methods, such absence of control can cause relatively few problems in the transmission of turbulence to the draw down region of the preform.

The applicant has now observed that by increasing the speed of the drawing process (e.g. up to about 20 m/s) and by using larger preforms for the drawing process, an increase in the flow rate of conditioning gas inside the furnace could be desirable, in order to both increase the velocity of said gas inside the furnace and to enhance the maintenance of the boundary layer of gas adjacent the draw fiber. The applicant has however observed that, in conventional furnaces, an increase of the flow rate in order to accordingly increase the velocity of the gas at the outlet, would increase the turbulence of the gas in the inlet zone of the furnace, with the risk that such turbulence being transmitted to the draw down region of the preform, thus causing unwanted diameter variations of the drawn fiber and possible take-up of graphite particulate material generated from the susceptor, which may adhere to the surface of the drawn fiber.

Another problem observed by the Applicant in connection with conventional graphite induction furnaces relates to the graphite insulating material disposed around the susceptor. Said insulating material are generally carbon or graphite felt-like materials in the form of flexible and compressible sheets, which need to be coupled with a rigid support for being used in the furnace. Typically, a sheet of such felt-like material is wrapped around the susceptor

PC809

- 10 -

for a number of turns, the susceptors thus serving as a support for the insulator.

The Applicant has however observed that the above felt-like insulating materials may pose some problems. In particular, as these felt-like materials are in the form of sheets which are wrapped around the susceptor for a number of turns, the disposition of said insulator around the susceptor shall be carefully accomplished, in order to maintain the highest uniformity in the insulating layer. In addition, during wrapping of the sheet around the susceptor, felt-like materials may release particulate matter which, at the high temperatures of the drawing process, may contaminate the optical preform or optical fiber. The Applicant has observed that, by increasing the dimensions of the furnace, as enhanced insulation performances would be required for the insulating layer, the above number of wrapping turns of insulating sheet should be increased, with the result of the above problems becoming more evident. In addition, it has also been observed that when substitution of the susceptor becomes necessary, e.g. because of consumption of the same upon use, also the insulator wrapped thereon should be removed and a new one re-wrapped around the new susceptor. Problems in keeping substantially constant the properties of the susceptor-insulator assembly may thus arise.

The Applicant has now observed that turbulence in the flow of conditioning gas can be reduced, in particular when relatively high flow rates are employed, by controlling the inlet flow of conditioning gas inside the drawing furnace as well as by suitably conforming the top and the bottom chimney connected to said furnace.

Applicant has thus developed an induction furnace, particularly adapted for drawing large preforms (more than 80 mm and up to about, e.g., 130 mm in diameter), that provides a substantial control over turbulence in the flow

PC809

- 11 -

of conditioning gas through the furnace and turbulence caused by unwanted intrusion of ambient atmospheric gases. Said furnace is in particular a graphite induction furnace.

A method and a furnace according to the present invention allows drawing preforms of larger diameter than conventional ones, therefore reducing the number of times that the furnace must be shut down to insert a new preform and increasing the amount of drawn fiber from a single preform, eventually reducing the costs of the drawing process.

In addition, use of a particular insulating material for a furnace according to the present invention allows improvements in terms of construction, maintenance and constancy of performance of the furnace.

One aspect of the present invention thus relates to a method for drawing an optical preform of large diameter into an optical fiber or into a preform of smaller diameter, said method comprising the steps of:

- introducing said optical preform into a drawing furnace;
- heating the bottom end of said preform into the furnace to its softening temperature;
- introducing a flow of conditioning gas into said furnace;

wherein the step of introducing the flow of conditioning gas comprises imparting a downward angled direction to said flow of conditioning gas entering said furnace.

In particular the above furnace comprises a furnace body and a top chimney connected to the top of said furnace, wherein the flow of conditioning gas is introduced into the top chimney of said furnace by imparting a downward angled direction to said flow of conditioning gas entering said top chimney.



10-05-1999

EP99109154.7

SPEC

PC809

- 12 -

Preferably, said downward angled direction forms an angle of from about 50° to about 20° with respect to the longitudinal axis of the drawing furnace, preferably from about 45° to about 25°, an angle of about 30° being

5 particularly preferred.

Preferably, said flow of conditioning gas is annular.

According to a preferred embodiment, the above furnace further comprises a bottom chimney connected to the bottom of said furnace and said method comprises the further step

10 of:

- allowing said gas to flow from said furnace body to said bottom chimney and then outside from said furnace, the speed of the conditioning gas in at least a lower portion of said bottom chimney having a gradient substantially

15 constant or slightly increasing.

Preferably, the increment of the velocity of the gas within said lower portion is from about 1/10 to about 1/100 per mm of height of said lower portion with respect to the velocity of the gas entering into said lower portion.

20 According to a preferred embodiment, the method comprises introducing the conditioning gas in an upper portion of said top chimney in a direction substantially transversal with respect to the longitudinal axis of the top chimney and substantially tangential with respect to

25 the inner circumferential surface of said chimney.

Another aspect of the present invention relates to a drawing furnace for drawing an optical preform into an optical fiber or into another preform having a smaller diameter, said furnace comprising:

30 - a furnace body having an upper end and a lower end and comprising at least a susceptor, an induction coil and an insulating material disposed between said susceptor and said induction coil; and

- a top chimney connected to the upper end of said furnace

35 body;

- 13 -

said top chimney comprising on its upper portion a distributor body through which conditioning gas is uniformly introduced into the top chimney and forcedly directed in a downward direction towards said furnace body.

5 According to a preferred embodiment, said distribution body comprises:

- an annular distribution chamber;
- a downward-angled annular outlet connected to said annular chamber and in fluid communication with the top chimney interior;

10 said annular outlet defining a downward-angled flow path from the top chimney interior towards the heating zone of the furnace.

Preferably, said annular outlet is downward-angled of an angle  $\alpha$  of less than about  $45^\circ$  with respect to the longitudinal axis of the furnace, preferably of from about  $40^\circ$  to  $20^\circ$ , an angle of about  $30^\circ$  being particularly preferred.

Preferably, a feed duct leading from a source of conditioning gas to said annular chamber is tangentially disposed with respect to said chamber.

According to a particularly preferred embodiment, a plurality of fins is radial disposed within the annular outlet.

25 Optionally, a porous filter can be provided inside the distributor body and interposed between the annular distribution chamber and downward-angled annular outlet.

The top chimney of a furnace according to the invention may also optionally include a support collar apt to receive and firmly hold one end of the optical preform or of a mother rod connected to said preform contained into the furnace. Preferably, said support collar is free to slide atop the distributor body. Preferably, a substantially ring-shaped resilient seal is provided on the interior wall

PC809

- 14 -

of the support collar, said seal preventing ambient atmosphere from entering into the furnace while allowing the preform or the mother rod to be removed from the interior of the furnace through said support collar without  
5 sticking to said seal. In particular, said seal defines a seal height and comprises a seal seat having a seat height, and two opposing seal walls, each of which extends from the seal seat, such that the ratio of the seat height to the seal height is less than about 2, preferably from about 2  
10 to about 1.4. Preferably, said two opposing walls have both a thickness of about 1 mm.

Another aspect of the present invention relates to a drawing furnace for drawing an optical preform into an optical fiber or into another preform having a smaller  
15 diameter, said furnace comprising:

- a furnace body having an upper end and a lower end and comprising at least a susceptor, an induction coil and an insulating material disposed between said susceptor and said induction coil; and
- 20 - a bottom chimney connected to the lower end of said furnace;

said bottom chimney comprising a lower portion tapered in the form of a substantially frusto-conical shaped nozzle, wherein the walls of said frusto-conical nozzle are  
25 angled of from about  $12^\circ$  to about  $15^\circ$  with respect to the longitudinal axis of the furnace.

Preferably said angle is of about  $14^\circ$ .

According to a preferred embodiment, said frusto-conical nozzle has a height of from about 200 mm to about  
30 300 mm.

In particular, said bottom chimney is particularly adapted for being connected to the lower end of a furnace body comprising the above described top chimney.

According to a preferred embodiment, said frusto-  
35 conical shaped nozzle is provided at its bottom end with a

PC809

- 15 -

shutter portion connected to the bottom end of said nozzle, defining an exit aperture that is adjustable to control the size of the exit aperture.

5 The bottom chimney of a furnace according to the invention may optionally include, either as a whole or only in the portion with a decreasing cross-sectional area, an inner wall and an outer wall, which together define a cooling space, through which cooling fluid is circulated to cool the interior of the bottom chimney surrounded by said  
10 cooling space.

Another aspect of the present invention relates to a drawing furnace, particularly adapted for, but not limited to, being connected to the above top and bottom chimney, said furnace comprising an insulator being a substantially  
15 cylindrical layer made of a rigid graphite material and capable of withstanding its own weight without collapsing onto the susceptor. Preferably, said rigid graphite material is comprised of graphite fibers oriented parallel to the axis of the insulating cylindrical layer. In  
20 particular, said cylindrical layer is an insulating cylinder preferably made from a single sheet of said rigid graphite material, two opposite ends of which are curved and held in contact to each other to form the cylinder. The thickness of said single sheet is preferably from about 45  
25 to about 60 mm.

Another aspect of the present invention relates to a drawing furnace as above described characterized in that the susceptor has an inner diameter of more than 100 mm, preferably of more than 120 mm and up to about 150 mm.

30 In the present description, when dealing with the term "drawing furnace", it is intended that said furnace can be used either for drawing an optical preform into an optical fiber or to stretch an optical preform of large diameter (e.g. of about 120 mm) into another preform of smaller  
35 diameter (e.g. of about 50 mm).

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate one embodiment of the invention and together with the description, serve to explain the principles of the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view of a graphite induction furnace according to the invention.

FIG. 2 is a cross-section view of a furnace body and bottom chimney of a preferred embodiment of a graphite induction furnace according to the invention taken on a plane through a diameter of the furnace.

FIG. 3 is a detail, cross-section view of a portion of an induction coil of the graphite induction furnace shown in FIG. 2 taken on the same plane as the cross-section of FIG. 2.

FIG. 4 is a cross-section view of a preferred embodiment of a top chimney for the graphite induction furnace shown in FIG. 2 taken on the same plane as the cross-section of FIG. 2.

FIG. 5 is a cross-section view of the top chimney of FIG. 4 taken on a plane perpendicular to the plane on which cross-section view of FIG. 4 is taken.

FIG. 6 is a schematic illustration of gas velocity vectors in a bottom chimney of a graphite induction furnace according to the invention.

FIG. 6A is a schematic illustration of gas velocity vectors in a bottom chimney of a conventional graphite induction furnace.

Fig. 7 is a cross-section view of a preferred embodiment of a seal to be used in the above top chimney.

Fig. 8 and 9 show two alternative embodiments of an induction coil to be disposed within the furnace.

FIG. 10 is a schematic view of a drawing system for drawing an optical fiber

**DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

Reference will now be made in detail to the present preferred embodiment of the invention, an example of which is illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

Fig. 10 schematically depicts a conventional system for drawing an optical fiber 102 from an optical preform, said system being typically located onto a so-called drawing tower. The drawing system generally comprises a drawing furnace 101, wherein the bottom of an optical preform is heated at its softening temperature, an apparatus 103 for measuring the diameter of the drawn fiber 102, a cooling apparatus 104 for cooling the fiber before coating it and a coating device 105 for applying the protective coating onto the fiber. The optical preform is generally connected to moving means for progressively moving the preform downwardly to the heating zone of the furnace while the fiber is being drawn. The coating device may comprise a coating die, containing a liquid curable resin composition (e.g. urethane-acrylate based resin), followed by a UV curing apparatus 106 (e.g. an UV oven) and by a device 107 for measuring the diameter of the coated fiber and the concentricity of said coating. When desired, further coating devices may be positioned after the first one, for applying further layers of different coating compositions onto the fiber.

A capstan 108 is positioned downstream from the coating device for controllably drawing the fiber from the preform, followed by a take-up wheel 109 for collecting the drawn fiber.

FIG. 1 is a high-level, schematic cross sectional view on a plane through the diameter of a furnace for drawing optical fiber according to the present invention. FIG. 1 is not to scale and does not illustrate all components of the furnace in detail. Generally, the furnace includes a furnace body F, a top chimney T and a bottom chimney B. A preform is introduced into the furnace body through the top chimney and as the preform is drawn into fiber, the fiber exits the furnace through the bottom chimney.

10 A preferred embodiment of a furnace according to the invention is illustrated in FIG. 2, which is a detailed cross-sectional view on a plane through a diameter of the furnace. The furnace body F comprises a cylindrical  
15 susceptor 2 housed within the interior of a cylindrical insulator 3. Insulator 3 is in turn preferably housed inside a cylindrical quartz beaker 4. Two annular quartz plates 25 and 27 maintain the alignment of quartz beaker 4 around susceptor 2. A clearance, preferably of about 3-5 mm, is preferably provided between the outer surface of  
20 susceptor 2 and the inner surface of insulator 3. A similar clearance is also provided between outer surface of insulator 3 and inner surface quartz beaker 4. The provision of these clearances allows an easier mounting of the assembly of the furnace body and easy removal and  
25 substitution of the single components of it, without interfering with the other components of the assembly.

The height of the furnace body is dimensioned so as to contain, together with the top chimney and the bottom chimney, the whole length of the preform. The height of the  
30 furnace body should be sufficiently extended so to heat the lower end of the preform in order to draw an optical fiber from it, but sufficiently reduced so to avoid unnecessary overheating of the remaining portion of the preform. For instance, a height of from about 600 to about 850 mm can be  
35 used, preferably of about 750 mm.

PC809

- 19 -

Coil 6 surrounds quartz beaker 4, being positioned at a distance of about 5-6 mm from the outer surface of quartz beaker 4. Coil 6 generates an electric field, which in turn generates eddy currents and thus heating in susceptor 2 to  
5 temperatures as high as about 2200°C. All these major components, coil 6, quartz beaker 4, insulator 3 and susceptor 2 are enclosed within housing 1.

Housing 1, which can be made of metal, e.g. copper, brass or, preferably, aluminum, is closed on the top and  
10 bottom ends by annular end plates 15 and 16, each having a centrally located aperture. These end plates and housing 1 may be made, for example, of aluminum. The apertures in the end plates mate with top chimney T and bottom chimney B. The end plates and the internal wall 1b of housing 1 define  
15 a furnace interior.

In the embodiment illustrated in FIGS. 1 and 2, housing 1 includes two walls, exterior wall 1a and interior wall 1b, which together define an annular cooling cavity 12. In the embodiment shown, external wall 1b has an outside  
20 diameter of 620 mm in diameter, and internal wall 1a has an outside diameter of 580 mm. The height of housing 1 is about 740 mm. To cool external housing 1, a cooling fluid flows through cooling cavity 12. For instance, the space between walls 1a and 1b is cooled by a flow of water.  
25 Cooling water enters cavity 12 via a plurality of water supply pipes 11. For example, three supply pipes 11 may be distributed around the perimeter of housing 1 at 120° intervals. Water is then discharged from cavity 12 through discharge pipes 13. Preferably, the numbers of supply pipes  
30 11 and discharge pipes 13 are equal and supply pipes 11 and discharge pipes are located on opposing sides of housing 1 so that cooling water uniformly cools housing 1.

Coil 6 is electrically connected to a source of high-frequency electric current (not shown) through passage 23.  
35 Current levels in coil 6 can lead to significant levels of



PC809

- 20 -

resistive heating. To control such heating, coil 6 may be made, for example, of copper tubing so that a cooling fluid, such as water, can be circulated through the coil 6 during operation of the furnace. The electrical field generated by the current flowing through coil 6 induces eddy currents in susceptor 2. A conditioning gas, for instance nitrogen, is preferably flown into space 43 where coil is housed, to preserve insulator and/or the susceptor from possible oxidation. Typical flow rates of this gas are from about 20 to about 30 l/min. Supply pipes 44 and discharge pipes 45 are provided onto housing 1, e.g. in the same manner as described for pipes 11 and 13, for allowing the flow of said gas into housing 1.

The structure that supports coil 6 inside housing 1 should not conduct significant electrical current. In the embodiment shown in fig. 9, three legs 18 made of insulating ceramic material are distributed within housing 1 at 120° intervals to support coil 6 adjacent quartz beaker 4 (not shown in fig 9). After coil 6 has been centered inside the furnace by fixing coil supports 18, the central axis of the coil 6 is precisely aligned with respect to the central axis of the furnace by acting on pins 70 which are inserted into corresponding vertical slots 71 provided onto support 18; once the correct alignment has been accomplished, the coil is fixed in such position by fixing each pin onto support 18, e.g. by means of nuts. Alternatively, as shown in fig. 8, the vertical slots in supports 18 can be replaced by a series of horizontal slots 72, each disposed at the appropriate height where the coil turn pin is supposed to stay. With this latter embodiment mounting and alignment operation are generally easier and the centering of the coil is quite more precise and constant in time.

Susceptor 2 of a furnace according to the present invention is typically made of graphite. In particular, the

PC809

- 21 -

- graphite susceptor material should have a relatively high thermal conductivity, preferably higher than about 50 W/m<sup>2</sup>°K, e.g of about 100 W/m<sup>2</sup>°K, and a relatively low specific resistance, preferably of about 1.0 · 10<sup>-5</sup> ohm·m, or
- 5 lower. The thermophysical and electrical properties of a preferred susceptor material commercialized under trademark Grede IG110 by Morganite are summarized below in Table 1.

Table 1-Thermophysical and Electrical Properties of Susceptor Material

Bulk density	1.77	g/cm <sup>3</sup>
Thermal conductivity	100	kcal/m hr °C
Specific resistance	1100	□ohm-cm
Ash content	20	ppm
Porosity	17	%

- In the preferred embodiment, susceptor 2 is about 6 mm thick with an inside diameter of 150 mm, making it
- 10 compatible with large preforms (up to about 130 mm in diameter).

- A conditioning gas is provided from the top chimney inside the cylindrical susceptor, for providing a controlled heating atmosphere inside the furnace and
- 15 preserving susceptor's surface from possible oxidation due to accidental inlet of air from the outside of the furnace. Any inert gas may be suitable as a conditioning gas including, but not limited to, helium, argon, and nitrogen, with helium preferred. Typically, said conditioning gas is
- 20 flown inside the furnace at a flow rate of from about 15 l/min to about 20 l/min. Said conditioning gas diffuses through susceptor into the gap provided between susceptor and insulator and then permeates the insulator. Due to the reduced width of said gap, the conditioning gas disposed

PC809

- 22 -

within said gap is substantially stationary, i.e. no substantial forced flow of gas is caused to take place within this gap.

Insulating material suitable for a furnace according to the present invention may also be graphite-based materials, for improving compatibility between susceptor and insulator. Insulating materials differ mainly in density (or porosity), thermal conductivity and resistivity from graphite based materials employed for the susceptor. In particular, density of graphite insulating materials is lower than about  $0.4 \text{ g/cm}^3$ , preferably lower than about  $0.2 \text{ g/cm}^3$  (compared with a typical density of at least  $1.5 \text{ g/cm}^3$  of graphite susceptor materials). Related to the lower density of the insulating materials is their higher apparent porosity, which is higher than about 70%, preferably higher than about 85% (compared with typical values of porosity of susceptor materials of about 20%). Due also to the relatively high porosity, said graphite insulating materials have good insulating properties. The thermal conductivity of these materials is relatively low, as compared with the one of susceptor materials. In particular said thermal conductivity is typically lower than about  $1.5 \text{ W/m} \cdot ^\circ\text{K}$ , preferably lower than about  $1.2 \text{ W/m} \cdot ^\circ\text{K}$  in argon atmosphere at  $2000^\circ\text{C}$ , and lower than about  $0.6 \text{ W/m} \cdot ^\circ\text{K}$ , preferably lower than about  $0.4 \text{ W/m} \cdot ^\circ\text{K}$  in argon atmosphere at  $400^\circ\text{C}$ . In order to limit possible electromagnetic coupling with the coil, the graphite insulating material should have a specific resistance substantially higher than the specific resistance of susceptor, preferably of about  $1.0 \cdot 10^{-3} \text{ ohm} \cdot \text{m}$ , or higher.

Commercial carbon or graphite felts can be used as insulating materials in a furnace according to the present invention, such as those commercialized, for instance, by SGL (e.g. Sigratherm KFA5 or KFA10) or by Union Carbide (e.g. National Grade VDG, Grade WDF or Grade GRI-1). As

PC809

- 23 -

previously said, these felt-like materials are in the form of flexible sheets which need to be coupled with a rigid support. Typically, a sheet of such felt-like material has a thickness of about 5-10 mm and is wrapped around the  
5   susceptor for a number of turns sufficient to impart the desired insulating properties, the susceptor being thus employed as a support for the insulator.

Advantageously, for the insulator of a furnace according to the present invention, a rigid graphite  
10   insulating material is preferably used, said material having a sufficient stiffness for being easily shaped into a self-standing cylinder. These materials are typically comprised of graphite fibers, the majority of which is disposed parallel to each other along a preferred  
15   direction. In order to be sufficiently stiff and withstand its own weight, said material should have a compression modulus of at least 0.1 Mpa in the longitudinal direction of the fibers, preferably of at least about 0.5 Mpa and up to about 10 Mpa, a compression modulus of about 1 Mpa being  
20   particularly preferred. Typically, the insulating cylinder is made from a single sheet of the desired thickness. The sheet is curved to form a cylinder and the two opposite ends of the curved sheet are held in contact to each other, e.g. by means of welding or sewing. The thus obtained  
25   insulating cylinder is able to withstand its own weight without collapsing onto the susceptor, thus allowing to maintain the desired gap (preferably about 3-5 mm) between insulator and susceptor. In case when substitution of the susceptor cylinder is necessary, e.g. because of  
30   consumption of the same, said susceptor may be easily removed from the furnace body without altering the whole geometry of the structure, thus leaving the insulating cylinder in place.

Examples of suitable materials with the desired  
35   characteristics are Sigratherm PR-200-16, PR-201-16 or PR-

PC809

- 24 -

202-16 (from SGL), CBCF<sup>®</sup> (Carbon Bonded Carbon Fiber) made by Morganite and UCAR Graphite RIGID Insulation made by Union Carbide. A preferred material for insulator 3 is CBCF<sup>®</sup>. CBCF<sup>®</sup> is rigid, of uniform porosity, easily machined and assembled. As previously mentioned, these materials are comprised of graphite fibers disposed parallel to each other along a preferred direction. In the embodiment of the present invention, the material is formed into a cylinder in such a way as to cause the graphite fibers to be mainly disposed parallel to the axis of the insulating cylinder.

A rigid graphite insulating cylinder according to the invention has a thickness of from about 45 to 60 mm and an inner diameter of from about 150 to about 160 mm. According to the preferred embodiment the thickness is about 52 mm and the internal diameter is about 156 mm. In the following table 2, some properties of a preferred insulating are given.

Table 2—Thermophysical and Electrical Properties of CBCF<sup>®</sup> Insulator

Density	0.17 ± 0.02 g/cm <sup>3</sup>
Thermal conductivity	0.55 W/mK (0.50 Kcal/Mh°C) at 1000°C in Ar
Electrical resistivity	1.10 × 10 <sup>-3</sup> Ωm (parallel to fibre orientation) 4.07 × 10 <sup>-3</sup> Ωm (perpendicular to fibre orientation)
Ash content	< 0.07%
Porosity	89% volume
Compressive strength	1.10 Mpa (parallel to fibre orientation)
Flexural strength	1.03 Mpa (parallel to fibre orientation)

Quartz beaker 4 is a cylindrical quartz tube with an external diameter of about 265-285 mm, about 275 mm in the

PC809

- 25 -

illustrated embodiment, and is disposed to surround insulator 3 and separate the conditioning gas inside the cylindrical susceptor 2 from the conditioning gas surrounding coil 6, when these are different. A horizontal quartz plate 25 having a central opening 26 and three concentric grooves in its lower surface is provided at the upper end of beaker 4. A horizontal quartz plate 27 also having a central opening 28 and three concentric grooves in its upper surface is provided at the lower end of the beaker 4. The ends of susceptor 2, insulator 3 and beaker 4 are housed in the concentric grooves in plates 25 and 27 so that these components are positively and precisely positioned in relation to each other and easily singularly removable. This method of positioning susceptor 2, insulator 3 and beaker 4 ensures consistent performance from one furnace to another. In the central grooves of the two plates 25 and 27, are inserted annular ridges 29 and 30 formed on the ends of insulator 3. Annular ridges 29 and 30 concentrically align insulator 3 around susceptor 2. The ends of susceptor 2 are housed within the innermost concentric groove of the two plates 25 and 27.

A hole 40 is made through beaker 4, insulator 3 and housing 1 to enable measurement of the temperature of the outer surface of susceptor 2 using a pyrometer set introduced into the furnace through passage 39. Due to the machinability of insulator 3, it is very easy to pierce it. The temperature measured by the pyrometer is used as a feedback parameter to control the power supply of the furnace.

FIG. 3 shows a section of coil 6, in which the hollow character of coil 6 is apparent as aperture 51. Cooling water flows through coil 6 in order to control the temperature of coil 6 below the melting point of the material of which it is made.

PC809

- 26 -

FIG. 4 is an elevational cross-section of top chimney T through a plane containing a diameter of chimney T. As shown in fig. 1, top chimney T provides an appropriate thermal and chemical environment for preform 32, which is supported by mother rod 35 during the preparation of preform 32 for drawing before it enters furnace body F. Rod 35 connects to preform 32, for example, with a hook and latch device or a pin-junction apparatus. As seen in FIGS. 1 and 4, top chimney T comprises quartz muffle 33, into which preform 32 is introduced. Quartz muffle 33 is preferably long enough to surround the entire preform 32 during the initial phase of the process when only the bottom end of preform 32 is adjacent the hottest part of susceptor 2.

The diameter of quartz muffle 33 is preferably substantially equal to the diameter of susceptor 2, e.g. 150 mm in the illustrated embodiment. Equal diameters for muffle 33 and susceptor 2 minimizes turbulence in the conditioning gas because muffle 33 and susceptor 2 form a smooth inner wall.

As seen in FIG. 1, an annular distributor 34 is disposed atop muffle 33. The annular form of distributor 34 allows to uniformly introducing the flow of conditioning gas into the furnace. Any inert gas may be suitable as a conditioning gas including, but not limited to, helium, argon, and nitrogen, with helium preferred. Use of such a conditioning gas ensures an inert, non-reactive atmosphere inside the susceptor 2 of furnace body F, the top chimney T and the bottom chimney B.

FIG. 4 is a detailed, cross-section view of distributor 34 taken along a plane containing a diameter of distributor 34. Distributor 34, is a generally cylindrical body defining an interior that is substantially sealed around mother rod 35 at the top and around muffle 33 at the bottom. Conditioning gas is introduced into the interior

PC809

- 27 -

where the gas flows downward inside the susceptor of furnace body F and out of bottom chimney B. Distributor 34 can be made primarily of stainless steel or preferably of aluminum.

- 5 In the embodiment shown in FIGS. 4 and 5, distributor 34 comprises attachment collar 105, conditioning gas distributor body 37 and support collar 38 for supporting mother rod 35 during operation of the furnace. Attachment collar is attached around muffle 33 and includes a top
- 10 surface 105a to which conditioning gas distributor body 37 is attached. A seal 116 is provided on the attachment collar, in contact with muffle 33.

- Conditioning gas distributor body 37 includes distributor casing top 103 having an upper surface 103a on
- 15 which support collar 38 slidably rides during operation of the furnace. Attachment collar 105, conditioning gas distributor body 37, and support collar 38 are described in further detail below.

- Distributor casing bottom 104 of conditioning gas
- 20 distributor body 37 is attached to attachment collar 105 via screws. Distributor casing top 103 is connected to distributor casing bottom 104 with screws. A distribution ring 107 is located between distributor casing bottom 104 and distributor casing top 103, said distribution ring 107
- 25 leaning on distributor casing bottom 104 through its fins 108. Annular distribution chamber 109 is formed between distributor casing bottom 104 and attachment collar 105.

- Referring to FIG. 5, which is a cross-sectional plan view of distributor 34, conditioning gas (coming from an
- 30 external feeding system not shown) is fed into distribution chamber 109 through two ducts 29. Ducts 29 are tangentially disposed with respect to distribution chamber 109. The tangential entrance of ducts 29 allows conditioning gas to enter distribution chamber 109 with little turbulence.



PC809

- 28 -

Distribution chamber 109 acts as a reservoir which eliminates irregularities in gas flux entering chamber 122.

If desired, a porous filter 106 can be provided as an inner wall inside distribution chamber 109. Before entering  
5 chamber 122, conditioning gas thus passes through said optional filter 106, said filter further improving uniformity of the flux of conditioning gas. A suitable filter for being used as filter 106 includes, but is not limited to, a filter made of metallic fibers, the FIBERMET  
10 AO Series, by MEMTEC (Memtec Applied Mechanics, 1750 Memtec Drive, Deland, Florida, USA).

After the conditioning gas has passed through optional filter 106, distribution ring 107 smoothly diverts its flow. The conical lower surface of distribution ring,  
15 together with distributor casing bottom 104, forms a downward-angled annular channel 110 through which the conditioning gas flows along paths 150. Thus, the flow of conditioning gas turns downward toward muffle 33. In order to minimize turbulence in the flow of conditioning gas, the  
20 applicant has observed that annular channel 110 should be angled of an angle  $\alpha$  of at least  $50^\circ$  with respect to the longitudinal axis of the furnace, preferably of from about  $45^\circ$  to about  $15^\circ$ , an angle  $\alpha$  of about  $30^\circ$  being particularly preferred. If angle  $\alpha$  is higher than about  
25  $50^\circ$ , the flow of gas would not be sufficiently downward directed. On the other side, an angle of  $0^\circ$  (i.e. with the flow of gas parallel to the longitudinal axis of the furnace) would be desirable as regards to the kinetic of the process, but difficult to realize in terms of  
30 apparatus, as in this case the distributor body should have a reduced cross section with respect to the remaining portion of the top chimney.

The applicant has noticed that when high flow rates of conditioning gas (e.g. about 100 slm - standard liter per

PC809

- 29 -

minute - or higher) are employed in a furnace according to the present invention having the above inlet positioned at 30° with respect to the longitudinal axis of the furnace, undesired levels of turbulence in the gas are not

5 transmitted to the draw down zone of the preform.

Conditioning gas flows farther along paths 150 between fins 108, radial disposed within annular channel 110, preferably in correspondence of the outlet of said channel. The presence of said fins at the outlet of channel 110  
10 contributes to substantially eliminate circumferential swirling components in the flow of gas.

Distribution ring 107 is also conical shaped on its upper surface so that a small amount of conditioning gas flows through upward-angled annular path 152, defined by  
15 upper surface 111 of distribution ring 107 and distributor casing top 103, into chamber 122. This flow of conditioning gas 152 creates a buffer that prevents ambient air from entering chamber 122 and thus muffle 33.

Support flange 102 of support body 38 can slidably be  
20 moved atop upper surface 103a of distributor casing top 103. Sealing collar 101 is attached to support flange 102 with screws. Sleeve 112 is inserted into a channel on the inner surface of support flange 102. Sleeve 112 is made of a low friction material, preferably Polytetrafluoroethylene  
25 (e.g Teflon™), to reduce any friction between preform 32 and the inner surface of support body 38. The diameter of sleeve 112 is sized to hold firmly mother rod 35, which functions as a handle for preform 32, or through which preform 32 is supported during fiber drawing. Thus, support  
30 body 38 positively guides mother rod 35 and preform 32 during operation of the furnace. Support body 38 may be used to horizontally slide mother rod 35 and preform 32 during operation of the furnace in order to prevent preform 32 or mother rod 35 from hitting any part of the  
35 distributor 34 during operation of the furnace. Preforms

PC809

- 30 -

and mother rods of different diameters may be accommodated by changing sleeve 112. Mother rod extending outwardly from support body 38 is blocked by means of, e.g., chucks (not shown) which firmly hold the preform. The preform is then  
5 moved downwardly during drawing operation for allowing a constant positioning of the melting zone of the preform inside the furnace.

Seal 114 is mounted in a channel on the inside wall of sealing collar 101. Seal 114 preserves the inert atmosphere  
10 inside the furnace. Conventional seals (e.g., EnerSeal by Advanced), which have a shallow cavity in their top surfaces, often exert too strong a sealing force on mother rod 35 or on preform 32. When such conventional seals are used, it may happen that by lifting the preform 32, the  
15 support body 38 may be firmly held in contact with said preform through said seal and lifted upwards with respect to the conditioning gas distributor body 37. Upon further lifting the preform, it may happen that such support body is suddenly released by said seal so that it falls onto  
20 conditioning gas distributor body 37, thus possibly damaging underlying distributor body 37.

Seal 114 is designed to exert sufficient sealing force onto mother rod 35 or preform 32 to prevent the ambient atmosphere from entering chamber 122. However, seal 114 is  
25 more resilient in the radial direction than conventional seals so that mother rod 35 or preform 32 may be smoothly withdrawn from support body 38 without sticking between mother rod 35 or preform 32 and seal 114. The added resilience of seal 114 is achieved by adopting a seal with  
30 a Y-shaped profile, as shown in fig. 7, where seat 115 forming the Y-shaped profile in seal 114 is deeper than in conventional seals. In particular, when the thickness of the seal walls 116 is about 1 mm, the ratio of the height  $H_2$  to the total seal height  $H_1$  is less than about 2,  
35 preferably from about 2 to about 1.4. In the depicted

PC809

- 31 -

embodiment, thickness of the walls of seal 114 is about 1 mm, the seal has a total height of about 10 mm and a height of about 5.8 mm from the seat 155. Said seal is made of an inert elastomeric material resistant to the high

- 5 temperatures of the furnace. Preferably a fluoroelastomer, such as Viton®, is employed.

As seen schematically in FIG. 1 and in more detail in FIG. 2, bottom chimney B is attached to the lower portion of furnace body F. Bottom chimney B includes a water-cooled  
10 cylindrical tube 40 protruding from the bottom of furnace F. Cone 41, which may also be water-cooled, is connected to the lower end of cylinder 40. Conical shutter 42 is connected to the lower portion of cone 41. Shutter 42 is made of two separable halves, which can be spaced apart at  
15 the beginning of drawing operations, for allowing a larger passage for the initial glass drop coming from the preform. During the drawing process, the two halves of the shutter are positioned closely, leaving an outlet at the bottom of the bottom chimney of about 20 mm diameter.

- 20 With conventional constant cross-section bottom chimneys, possible turbulence in the conditioning gas as it flows through the bottom chimney causes undesirable oscillations in the diameter of the fiber. The conical shape of cone 41 of the end portion of bottom chimney B  
25 results in gradual changes in the cross-sectional area through which the conditioning gas flows. Thus, the velocity of the conditioning gas as it flows through bottom chimney B also changes gradually and turbulence is minimized. The smooth flow of conditioning gas through the  
30 bottom chimney minimizes unwanted oscillations in fiber diameter.

Because shutter 42 delimits a very narrow exit passage to the conditioning gas, cone 41 is particularly suitable for reducing turbulence avoiding the formation of eddies  
35 due to gas recirculation caused by gas impinging the

PC809

- 32 -

occluded part of the shutter. This effect is clarified with the aids of the sketch of flow paths shown in FIGS. 6 and 6A. FIG. 6 depicts the flow paths of gas flow through one embodiment of a bottom chimney according to the invention.

- 5 All flow paths converge at the exit of the bottom chimney. The flow is orderly and nearly free of turbulence.

FIG. 6A depicts flow paths of gas flow through a conventional bottom chimney having a substantially constant diameter along its length and a significantly smaller exit  
10 diameter at the shutter than the diameter of the chimney immediately above the shutter. As shown, eddies may be generated inside the gas flow on the lateral portions of the flow, which would lead to undesired gas turbulence inside the furnace.

- 15 As a matter of fact, the velocity of the conditioning gas flowing through conical portion 41 of the bottom chimney gradually increases, thus gradually reaching the desired outlet velocity at the exit from the bottom chimney, and no eddies are generated inside the bottom  
20 chimney. The above conical shape of said bottom chimney thus allows to impart a substantial constant or slightly increasing gradient of velocity to the conditioning gas.

Preferably, the increment of the velocity of the gas within said conical portion 41 is from about 1/10 to about  
25 1/100 per mm of height of said portion with respect to the velocity of the gas entering into said portion. For instance, a conditioning gas entering into a conical portion of about 180 mm height with a velocity of about 0.2 m/s will have a velocity at the exit of said portion (i.e.  
30 at the inlet of the shutter 42) of about 1.25 m/s.

For generating the above gradients in the velocity of the conditioning gas, the conical end portion of the bottom chimney is angled of from about 12° to about 16° with respect to the longitudinal axis of the furnace, preferably  
35 of about 14°. Angles lower than about 12°, although more

PC809

- 33 -

desirable for generating a much more gradual increase of the of the velocity of the conditioning gas, would however either require a too long conical portion of the bottom chimney if the outlet diameter is maintained unaltered

5 (thus undesirably increasing the height of the drawing tower), or to increase the diameter of the outlet if the length of the conical portion is maintained unaltered (thus undesirably reducing the outlet velocity and pressure of the gas). On the other side, angles greater than about 16°

10 can much easier create undesired eddies in the conditioning gas flowing through the bottom chimney.

When flowing through shutter 42, the conditioning gas further increases its velocity and the gradient becomes much more steep. The pressure of the gas is thus increased

15 and this avoids undesired updraft of outside atmospheric gases into the furnace.

Conical end portion 41 of the bottom chimney has a height of from about 100 mm to about 250 mm, preferably of about 175 mm. The height of shutter 42 is from about 60 to

20 90 mm, preferably of about 75 mm.

Shutter 42 can slide in a direction perpendicular to the long axis of the preform in order to allow for the passage of the drop-off during drawing initial phase. When in this open position, a gap exists between halves of

25 shutter 42. Once the drop-off has fallen through shutter 42, the halves may be slid together to form an extension of cone 41 with an opening at the bottom of shutter 42 sufficiently small to closely surround the drawn fiber.

It will be apparent to those skilled in the art that

30 various modifications and variations can be made induction furnace of the present invention and in construction of this furnace without departing from the scope or spirit of the invention. For instance, the top and bottom chimney disclosed with particular reference to graphite induction

35 furnaces can be advantageously employed also for the

zirconia type induction furnaces. Other embodiments of the invention will be apparent to those skilled in the art from their consideration of the specification and practice of the invention disclosed in this document.

PC809

- 35 -

CLAIMS

1. Method for drawing an optical preform of large diameter into an optical fiber or into a preform of smaller diameter, said method comprising the steps of:
  - introducing said optical preform into a drawing furnace;
  - heating the bottom end of said preform into the furnace to its softening temperature;
  - introducing a flow of conditioning gas into said furnace;wherein the step of introducing the flow of conditioning gas comprises imparting a downward angled direction to said flow of conditioning gas entering said furnace.
2. Method according to claim 1 wherein the above furnace comprises a furnace body and a top chimney connected to the top of said furnace, and wherein the flow of conditioning gas is introduced into the top chimney of said furnace by imparting a downward angled direction to said flow of conditioning gas entering said top chimney.
3. Method according to claim 1 wherein said downward angled direction forms an angle of from about 50° to about 20° with respect to the longitudinal axis of the drawing furnace.
4. Method according to claim 1 wherein said furnace further comprises a bottom chimney connected to the bottom of said furnace, said method further comprising the step of allowing said gas to flow from said furnace body to said bottom chimney and then outside from said furnace, the speed of the conditioning gas in at least a lower portion of said bottom chimney having a gradient substantially constant or slightly increasing.
5. Method according claim 1 wherein the conditioning gas is introduced in the upper part of said top chimney in a



direction substantially transversal with respect to the central axis of the top chimney and substantially tangential with respect to the inner circumferential surface of said chimney.

- 5 6. Drawing furnace for drawing an optical preform into an optical fiber or into another preform having a smaller diameter, said furnace comprising:
- a furnace body having an upper end and a lower end and comprising at least a susceptor, an induction coil and an
  - 10 insulating material disposed between said susceptor and said induction coil; and
  - a top chimney connected to the upper end of said furnace body;
- 15 said top chimney comprising on its upper portion a distributor body for uniformly introducing said conditioning gas into the top chimney and forcedly directing it in a downward direction towards said furnace body.
- 20 7. Drawing furnace according to claim 6, wherein said distributor body comprises:
- an annular distribution chamber;
  - a downward-angled annular outlet connected to said annular chamber and in fluid communication with the top chimney interior;
- 25 said annular outlet defining a downward-angled flow path from the top chimney interior towards the heating zone of the furnace.
- 30 8. Drawing furnace according to claim 7 further comprising a feed duct leading from a source of conditioning gas to said annular chamber, said duct being tangentially disposed with respect to said chamber.
9. Drawing furnace according claim 6 further including a support collar apt to receive and firmly hold one end of

10-05-1999

EP99109154.7

SPEC

PC809

- 37 -

the optical preform or of a mother rod connected to said preform contained into the furnace.

10. Drawing furnace according to claim 9 wherein a substantially ring-shaped resilient seal is provided on the interior wall of the support collar, said seal preventing ambient atmosphere from entering into the furnace while allowing the preform or the mother rod to be removed from the interior of the furnace through said support collar without sticking to said seal.
- 10 11. Drawing furnace according to claim 6 further comprising a bottom chimney connected to the lower end of said furnace, said bottom chimney comprising at least a lower portion with a decreasing cross-sectional area from the top to the bottom of the bottom chimney in a plane perpendicular to the longitudinal axis.
12. Drawing furnace according to claim 11 wherein said lower portion is tapered in the form of a substantially frusto-conical shaped nozzle, wherein the walls of said frusto-conical nozzle are angled of from about 12° to about 16° with respect to the longitudinal axis of the furnace.
13. Drawing furnace according to claim 12, wherein said frusto-conical shaped nozzle is provided at its bottom end with a shutter portion connected to the bottom of said nozzle, defining an exit aperture that is adjustable to control the size of the exit aperture.
14. Drawing furnace according to claim 6, wherein said insulating material is a rigid graphite material shaped in the form of a substantially cylindrical hollow body, capable of withstanding its own weight without collapsing onto the susceptor.
15. Drawing furnace according to claim 14 wherein said cylindrical body is made from a single sheet of said rigid graphite material, two opposite ends of which are curved and held in contact to each other to form the cylinder.


PC809




- 38 -


16. Drawing furnace according to any of the preceding claims wherein the susceptor has an inner diameter of more than 100 mm.
17. Drawing furnace for drawing an optical preform into an  
5 optical fiber or into another preform having a smaller diameter, said furnace comprising at least a susceptor, an induction coil and an insulating material disposed between said susceptor and said induction coil, wherein said susceptor has an inner diameter of more than 100 mm.



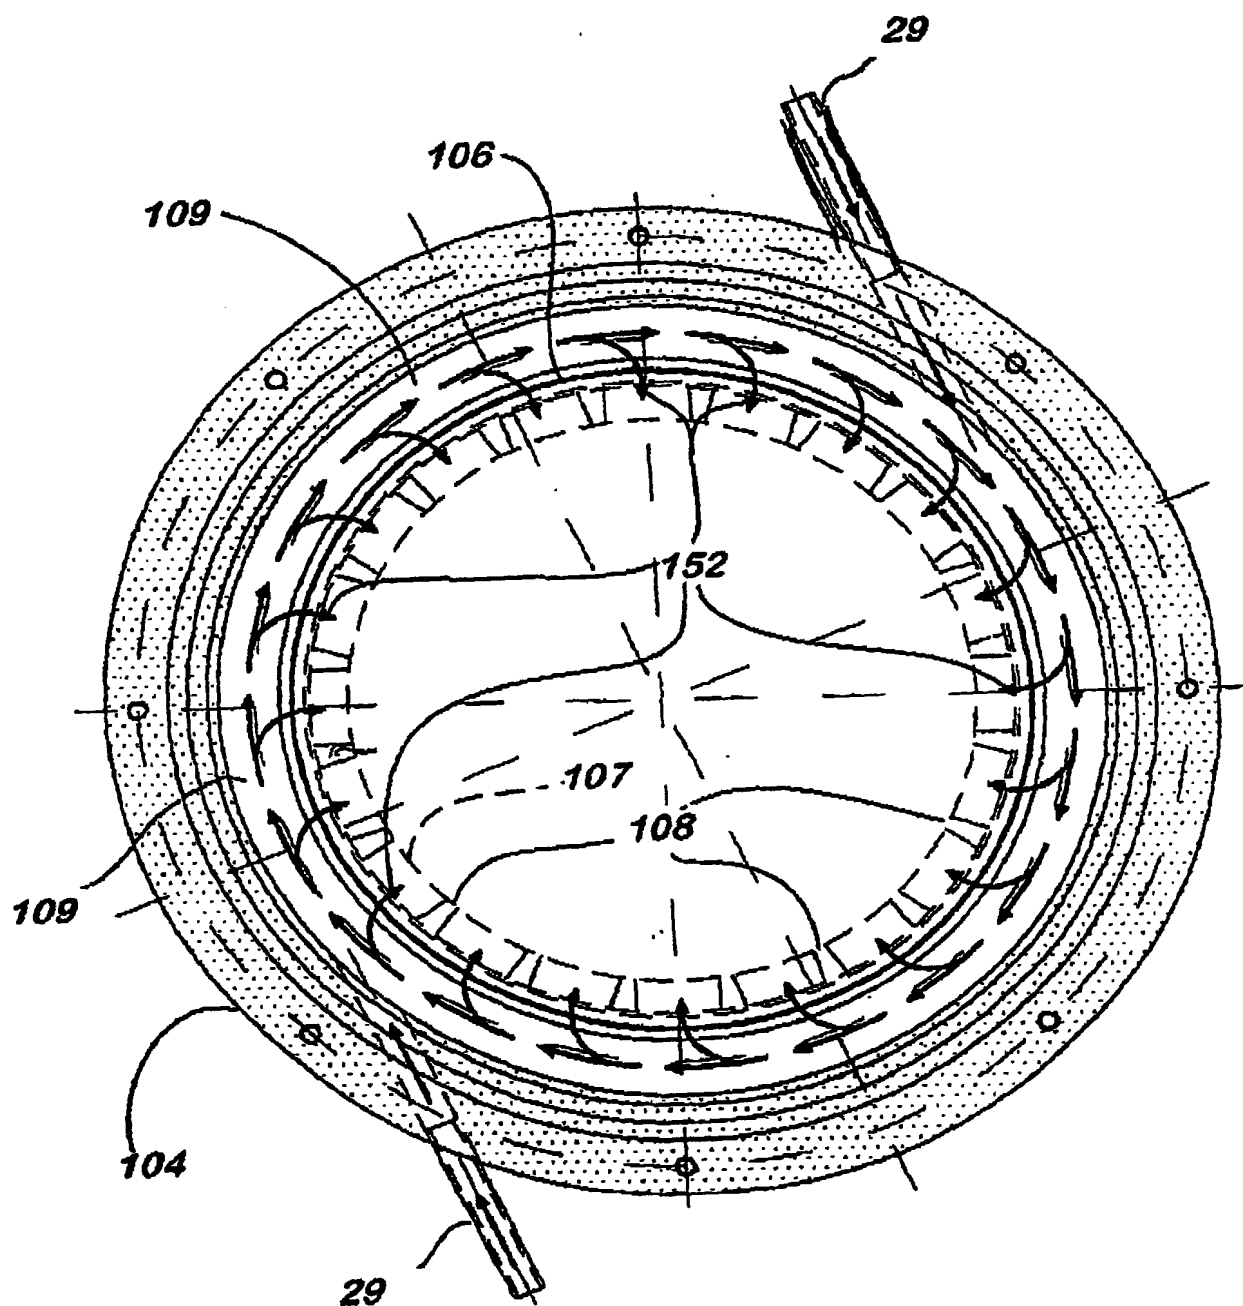

**FIG. 5**

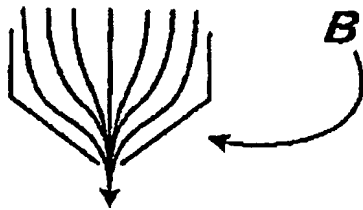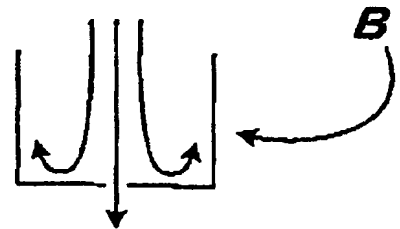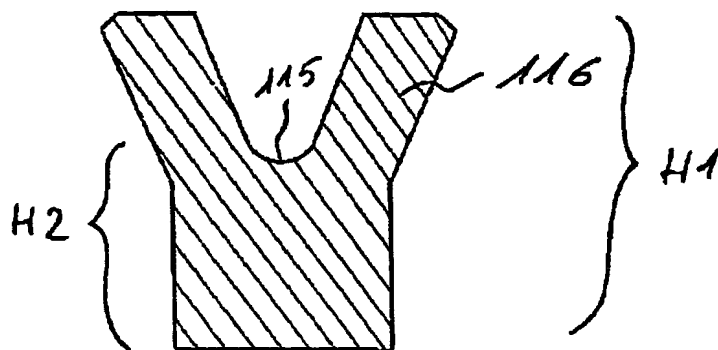**FIG. 6****PRIOR ART****FIG. 6A****Fig. 7.**

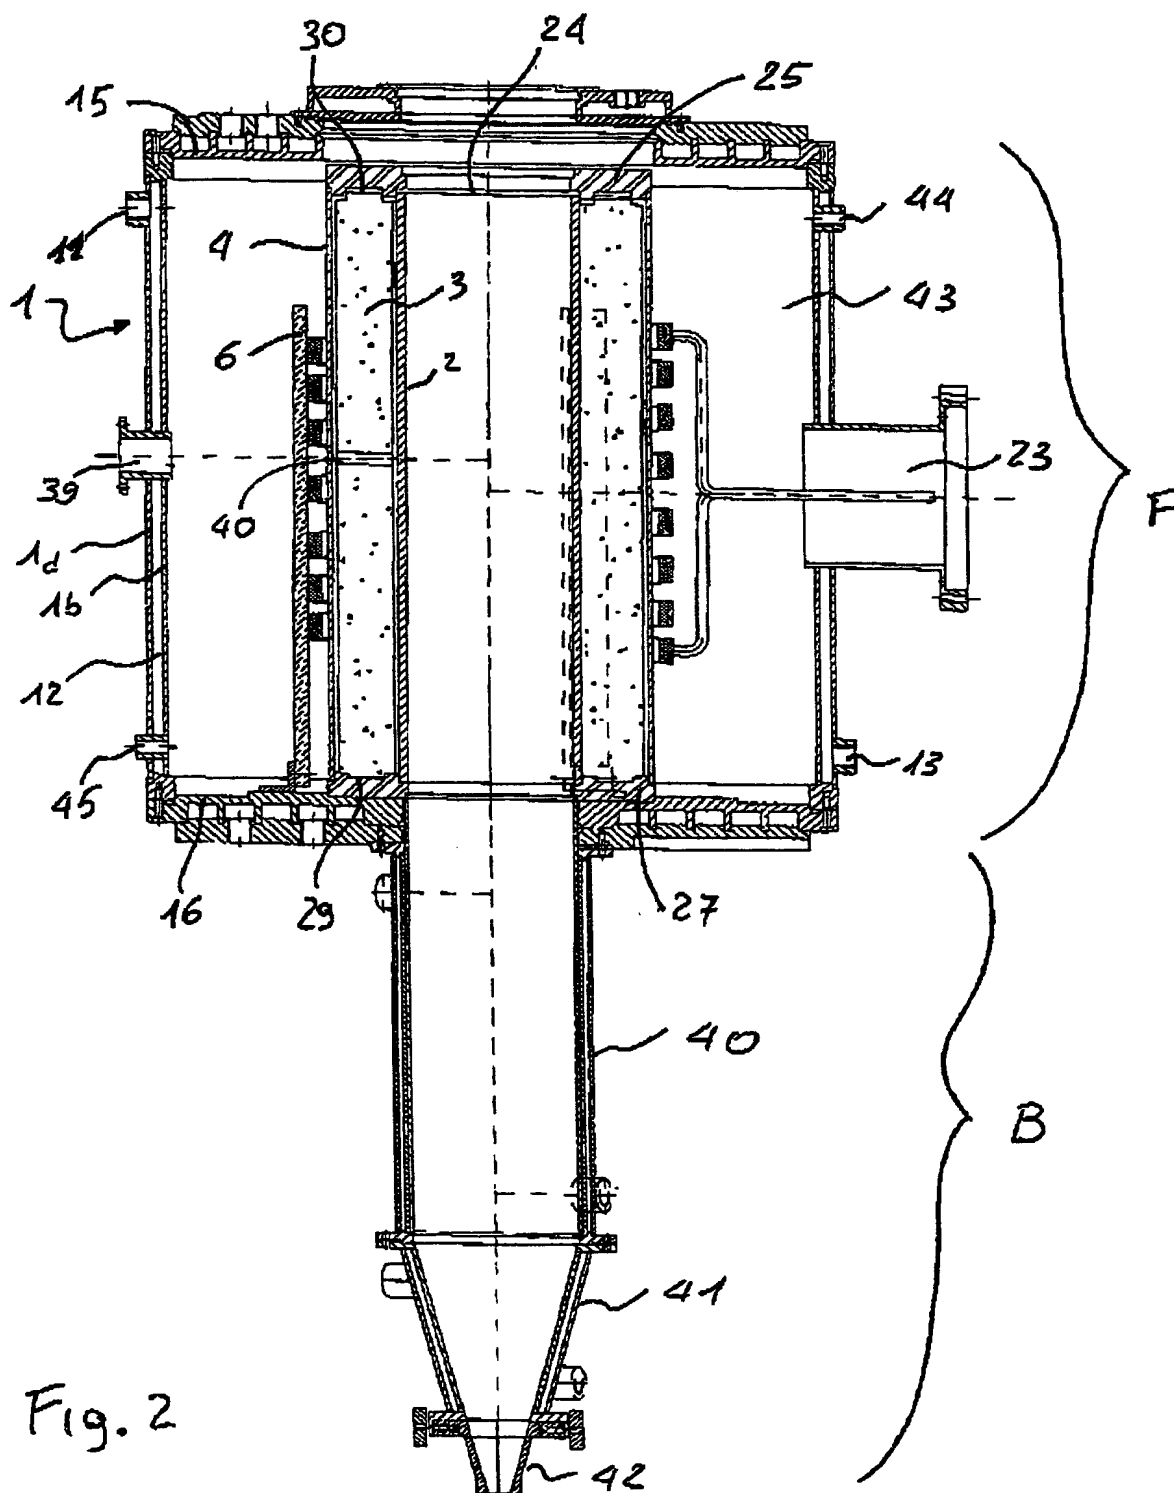



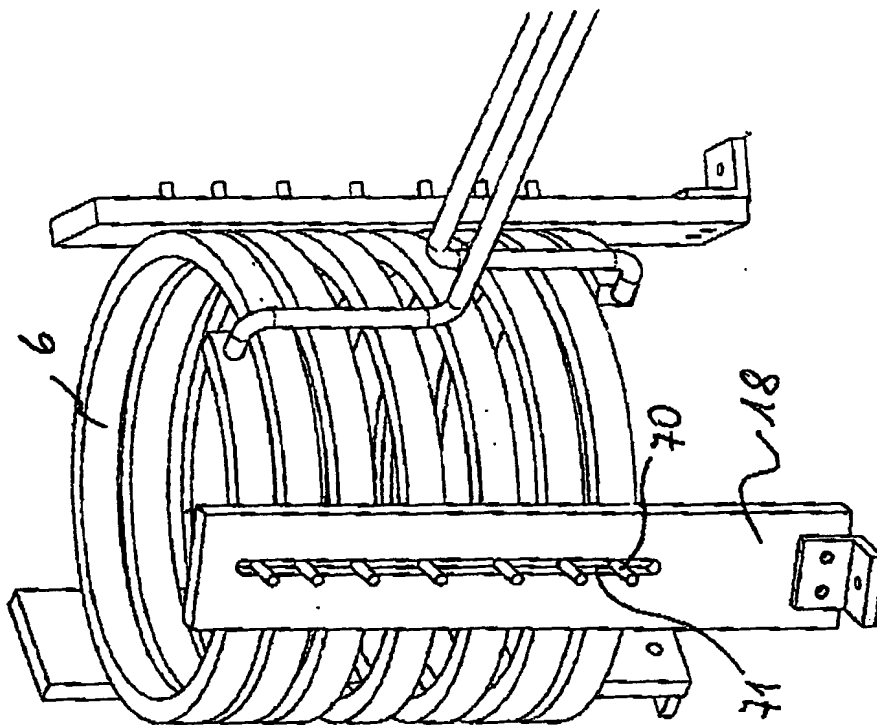


Fig. 9

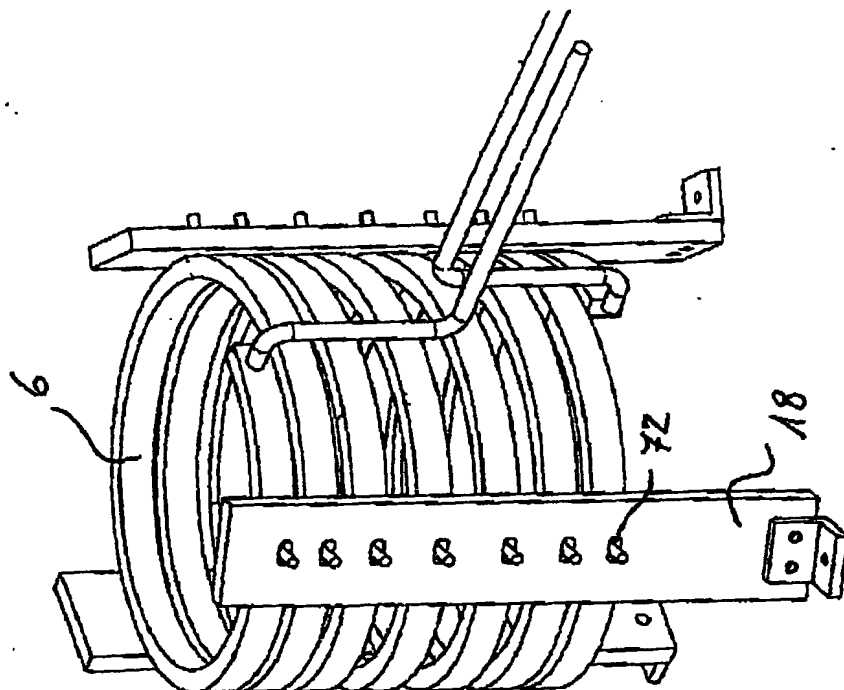
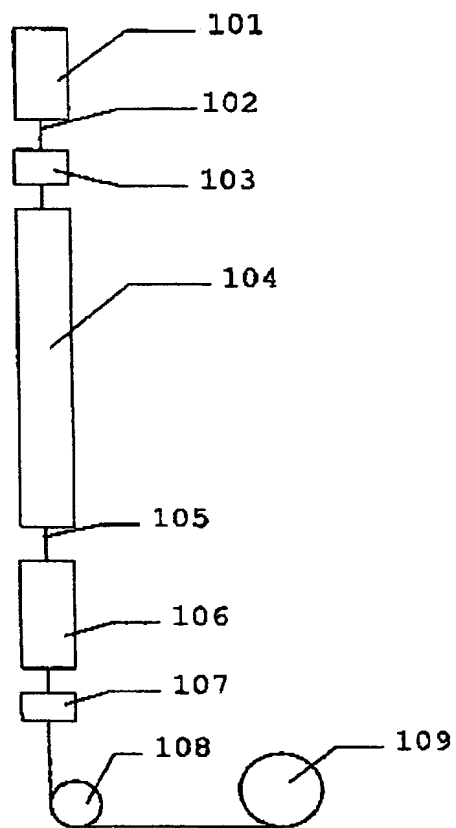


Fig. 8

**FIG. 10**

PC809

- 39 -

**ABSTRACT**

An induction furnace capable of drawing large diameter preforms of up to about 130 mm is described. The furnace includes top and bottom chimneys adapted to surround the entire preform during operation of the furnace with an inert conditioning gas. The conditioning gas is introduced into the top chimney and flows downward through the top chimney, the furnace body and the bottom chimney without significant turbulence. A distributor ring inside the top chimney redirects flow from a circumferential direction to a downward direction without introducing turbulence. The top chimney also includes a seal of sufficient resilience to hold the top of the preform in place but predictably release the preform when necessary. The bottom chimney has a smoothly decreasing cross-sectional area in a plane perpendicular to the direction in which fibers are drawn in order to prevent turbulence from forming at the exit passage to the furnace. The insulator of the furnace is preferably made of a rigid self-standing graphite cylinder, disposed with a gap around

Fig. 1

